


__SimpleCmd__ CmdTemplate

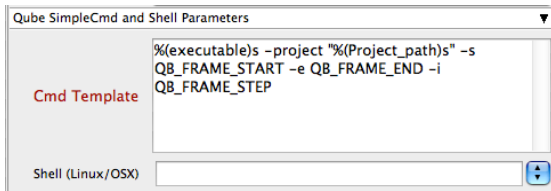

The screenshot shows a dialog box titled "Qube SimpleCmd and Shell Parameters". It has two main sections: "Cmd Template" and "Shell (Linux/OSX)". The "Cmd Template" section contains a text area with the following command string: `%(executable)s -project "%(Project_path)s" -s QB_FRAME_START -e QB_FRAME_END -i QB_FRAME_STEP`. The "Shell (Linux/OSX)" section has a text input field and a dropdown arrow button.

✓ [Click here for details...](#)

Cmd Template

This is used to create the command string for launching the job on the worker. It will be set differently depending on the application you are launching from.

Shell (Linux/OSX)

Explicitly specify the Linux/OS X shell to use when executing the command (defaults to /bin/sh).