


__SimpleCmd__CmdTemplate

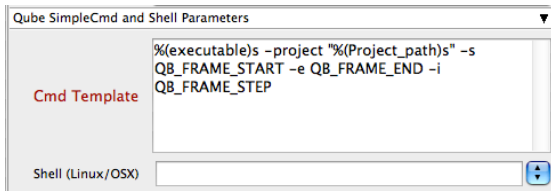

Qube SimpleCmd and Shell Parameters

Cmd Template

```
%(executable)s -project "%(Project_path)s" -s  
QB_FRAME_START -e QB_FRAME_END -i  
QB_FRAME_STEP
```

Shell (Linux/OSX)

✓ [Click here for details...](#)

Cmd Template

This is used to create the command string for launching the job on the worker. It will be set differently depending on the application you are launching from.

Shell (Linux/OSX)

Explicitly specify the Linux/OS X shell to use when executing the command (defaults to /bin/sh).